

HAMMOND MANUFACTURING COMPANY LIMITED
 394 EDINBURGH RD. GUELPH ONT. CANADA N1H 1E5
 PHONE (519) 822-2960 OR (416) 456-3770 TELEX: 069-56523

HAMMOND MANUFACTURING COMPANY (U.S.) INC.
 385 NAGEL DRIVE BUFFALO NEW YORK U.S.A. 14225
 PHONE (716) 683-8181 TELEX: 91-6452





EFFECTIVE APR. 78
 SUPERSEDES SEPT. 75

M HAMMOND
 MANUFACTURING™

W INSTRUCTION BULLETIN
 PRODUCT SECTION 50

161-162

LOW VOLTAGE RECTIFIER TRANSFORMERS


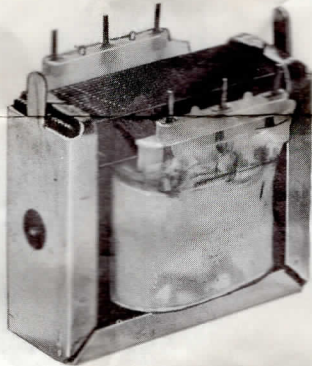


- Economical bobbin winding with convenient P. C. pins.
- Ideal for full wave centre tap or bridge circuits.
- Winding connections to pins are ideally suited for P. C. board layouts.
- Ratings to suited requirements of most miniaturized solid state circuits.

161 SERIES

Cat. No.	Sec. Volts		Sec. Amps.		Dimensions					Wt. Lb.
	Series	Parallel	Series	Parallel	A	B	C	E	F	
Primary 115 volts, 60 Hz.										
161 C10	10.0	5.0	0.05	0.10	1.00	0.94	0.84	0.78	0.20	0.06
161 F10	10.0	5.0	0.3	0.6	1.38	1.19	1.22	1.00	0.31	0.19
161 G10*	10.0	5.0	0.5	1.0	1.69	1.25	1.45	1.10	0.40	0.31
161 J10*	10.0	5.0	1.0	2.0	1.94	1.44	1.72	1.30	0.40	0.56
161 C12	12.6	6.3	0.04	0.08	1.00	0.94	0.84	0.78	0.20	0.06
161 F12	12.6	6.3	0.25	0.5	1.38	1.19	1.22	1.00	0.31	0.19
161 G12*	12.6	6.3	0.5	1.0	1.69	1.25	1.45	1.10	0.40	0.31
161 K12*	12.6	6.3	0.8	1.6	1.94	1.44	1.72	1.30	0.40	0.56
161 E16	16.0	8.0	0.18	0.36	1.38	1.19	1.22	1.00	0.31	0.19
161 F16*	16.0	8.0	0.3	0.6	1.69	1.25	1.45	1.10	0.40	0.31
161 G16*	16.0	8.0	0.5	1.0	1.94	1.44	1.72	1.30	0.40	0.56
161 E20	20.0	10.0	0.15	0.3	1.38	1.19	1.22	1.00	0.31	0.19
161 F20*	20.0	10.0	0.3	0.6	1.69	1.25	1.45	1.10	0.40	0.31
161 G20*	20.0	10.0	0.5	1.0	1.94	1.44	1.72	1.30	0.40	0.56
161 G24*	24.0	12.0	0.5	1.0	1.94	1.44	1.72	1.30	0.40	0.56

*These models have channel bracket mounting with P. C. pins.

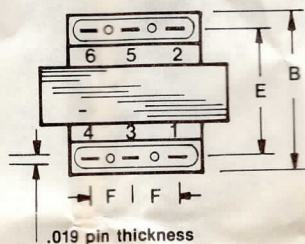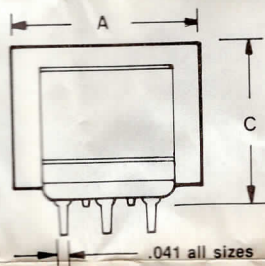

Other ratings on these bobbin sizes available on special order.

162 SERIES

Cat. No.	Sec. Volts		Sec. Amps.		Dimensions					Wt. Lb.
	Series	Parallel	Series	Parallel	A	B	C	E	F	
Primary 230 volts, 50/60 Hz.										
162 E10	10.0	5.0	0.24	0.48	1.38	1.19	1.22	1.00	0.31	0.19
162 K10*	10.0	5.0	0.8	1.6	1.94	1.44	1.72	1.30	0.40	0.56
162 E12	12.6	6.3	0.2	0.4	1.38	1.19	1.22	1.00	0.31	0.19
162 H12*	12.6	6.3	0.64	1.28	1.94	1.44	1.72	1.30	0.40	0.56
162 F16*	16.0	8.0	0.4	0.8	1.94	1.44	1.72	1.30	0.40	0.56
162 F20*	20.0	10.0	0.4	0.8	1.94	1.44	1.72	1.30	0.40	0.56
162 F24*	24.0	12.0	0.4	0.8	1.94	1.44	1.72	1.30	0.40	0.56

*These models have channel bracket mounting with P. C. pins.